


GUARNI -

pag	99	ANELLI DI TENUTA O R
pag	100	ANELLI DI TENUTA O R
pag	101	ANELLI DI TENUTA O R
pag	102	ANELLI DI TENUTA O R
pag	103	ANELLI DI TENUTA O R

ANELLI DI TENU-

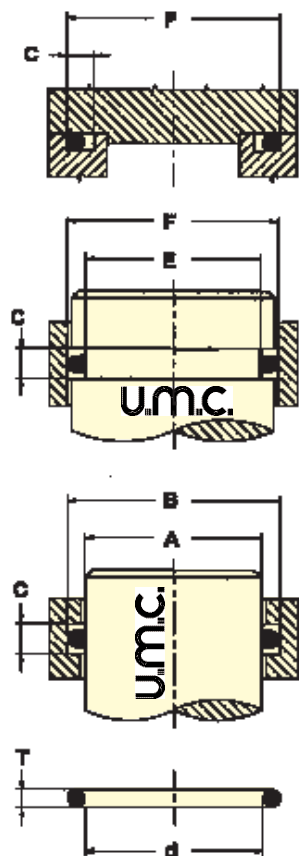

Corda	T (mm)	1.78	2.62	3.53	5.34	7.0
Gola	C (mm)	2.5	3.5	4.5	7	9.5


codice	A	B	E	F	d	T
OR02007	2	5.0	1.8	5	1.78	1.78
OR02010	2.5	5.6	2.6	5.8	2.57	1.78
OR02012	3	6.0	3.4	6	2.90	1.78
OR02015	4	6.8	4.4	7	3.69	1.78
OR02018	5	7.6	5.4	8	4.48	1.78
OR02021	5.5	8.3	5.4	8	5.28	1.78
OR02025	6	8.8	6.4	9	6.07	1.78
OR00106	7	9.8	7.4	10	6.75	1.78
OR02031	8	10.6	8.4	11	7.66	1.78
OR00108	9	11.6	9.4	12	8.73	1.78
OR02037	10	12.6	10.4	13	9.25	1.78
OR02043*	11	13.6	11.4	14	10.82	1.78
OR00114*	11	13.6	12.4	15	11.11	1.78
OR02050*	13	15.6	13.4	16	12.42	1.78
OR02056	14	16.6	15.4	18	14.00	1.78
OR02062*	16	18.6	16.4	19	15.60	1.78
OR02068	17	19.6	18.4	21	17.17	1.78
OR02075*	19	21.6	19.4	22	18.17	1.78
OR02081*	21	23.6	21.4	24	20.35	1.78
OR02087*	22	24.6	23.4	26	21.95	1.78
OR02093*	24	26.6	24.4	27	23.52	1.78
OR02100*	25	27.6	25.4	28	25.12	1.78
OR02106*	27	29.6	27.4	30	26.70	1.78
OR02112*	28	30.6	29.4	32	28.30	1.78
OR02118*	30	32.6	30.4	33	29.87	1.78
OR02125*	32	34.6	32.4	35	31.47	1.78
OR02131*	33	35.6	33.4	36	33.05	1.78
OR02137*	35	37.6	35.4	38	34.65	1.78
OR02150*	38	40.6	38.4	41	37.82	1.78
OR02162*	41	43.6	42.4	45	41.00	1.78
OR02175*	44	46.6	45.4	48	44.17	1.78
OR02187*	48	50.6	48.4	51	47.35	1.78
OR02200*	51	53.6	51.4	54	50.52	1.78
OR02212*	54	56.6	54.4	57	53.70	1.78
OR02224*	57	59.6	57.4	60	56.87	1.78
OR02237*	60	62.6	61.4	64	60.05	1.78
OR02250*	64	66.6	64.4	67	63.22	1.78
OR02262*	67	69.6	67.4	70	66.40	1.78
OR02275*	70	72.6	70.4	73	69.57	1.78
OR02287*	73	75.6	73.4	76	72.75	1.78
OR02300*	76	78.6	76.4	79	75.92	1.78
OR02325*	82	84.6	82.4	85	82.27	1.78
OR02350*	89	91.6	89.4	92	88.62	1.78
OR02375*	95	97.6	95.4	98	94.97	1.78
OR02400*	102	104.6	102.4	105	101.32	1.78
OR02425*	108	110.6	108.4	111	107.67	1.78
OR02450*	114	116.6	114.4	117	114.02	1.78
OR02475*	121	123.6	121.4	124	120.37	1.78
OR02500*	127	129.6	127.4	130	126.72	1.78
OR02525*	133	135.6	133.4	136	133.07	1.78
OR03021	5	9.5	5.9	10	5.23	2.62
OR03024	5	10.5	6.9	11	6.02	2.62
OR03030	8	12.5	8.9	13	7.59	2.62
OR00109	9	13.5	9.9	14	9.13	2.62
OR03037	9	13.5	9.9	14	9.19	2.62
OR00112	10	14.5	10.9	15	9.92	2.62
OR03043	11	15.5	11.9	16	10.78	2.62
OR00115	12	16.5	12.9	17	11.91	2.62
OR03050	12.5	16.7	13.9	18	12.37	2.62
OR00117	13	17.4	13.9	18	13.10	2.62
OR03056	14	18.4	14.9	19	13.95	2.62
OR00119	15	19.4	15.9	20	15.08	2.62
OR03062	15.5	19.8	16.9	21	15.54	2.62
OR00121	16	20.1	16.9	21	15.88	2.62
OR03068	17	21.1	17.9	22	17.13	2.62
OR00123	18	22.1	18.9	23	17.86	2.62
OR03075	19	23.1	19.9	24	18.72	2.62
OR03081*	20	24.1	20.9	25	20.24	2.62
OR00128*	21	25.1	21.9	26	20.63	2.62
OR03087	22	26.1	22.9	27	21.89	2.62
OR00130*	23	27.1	22.9	27	22.22	2.62
OR03093	24	28.1	24.9	29	23.47	2.62
OR00132*	24	28.1	24.9	29	23.81	2.62
OR03100*	25	29.1	25.9	30	25.07	2.62
OR03106*	27	31.1	27.9	32	26.65	2.62
OR03112*	28	32.1	28.9	33	28.25	2.62
OR03118*	30	34.1	30.9	35	29.82	2.62
OR03125*	32	36.1	32.9	37	31.42	2.62
OR03131*	33	37.1	33.9	38	32.99	2.62
OR03137*	35	39.1	35.9	40	34.60	2.62
OR03143*	36	40.1	36.9	41	36.14	2.62
OR03150*	38	42.1	38.9	43	37.77	2.62
OR03156*	40	44.1	40.9	45	39.34	2.62
OR03162*	41	45.1	41.9	46	40.95	2.62
OR03168*	43	47.1	43.9	48	42.52	2.62

*OR da usare solo per tenute statiche

Corda	T (mm)	1.78	2.62	3.53	5.34	7.0
Gola	C (mm)	2.5	3.5	4.5	7	9.5


ANELLI DI TENU- TA O R

codice	A	B	E	F	d	T
OR03175*	44	48.1	44.9	49	44.12	2.62
OR03181*	46	50.1	46.9	51	45.69	2.62
OR03187*	48	52.1	48.9	53	47.30	2.62
OR03193*	49	53.1	49.9	54	48.89	2.62
OR03200*	51	55.1	51.9	56	50.47	2.62
OR03206*	52	56.1	52.9	57	52.07	2.62
OR03212*	54	58.1	54.9	59	53.65	2.62
OR03218*	55	59.1	56.9	61	55.25	2.62
OR03225*	57	61.1	57.9	62	56.82	2.62
OR03231*	59	63.1	59.9	64	58.42	2.62
OR03237*	60	64.1	60.9	65	60.00	2.62
OR03243*	62	66.1	62.9	67	61.60	2.62
OR03250*	63	67.1	63.9	68	63.17	2.62
OR03256*	65	69.1	65.9	70	64.77	2.62
OR03262*	67	72.1	67.9	72	66.35	2.62
OR03268*	68	72.1	68.9	73	67.95	2.62
OR03275*	70	74.1	70.9	75	69.52	2.62
OR03281*	71	75.1	71.9	76	71.12	2.62
OR03287*	73	77.1	73.9	78	72.69	2.62
OR03300*	76	80.1	76.9	81	75.87	2.62
OR03325*	83	87.1	82.9	87	82.22	2.62
OR03350*	89	93.1	89.9	94	88.57	2.62
OR03375*	95	99.1	95.9	100	94.92	2.62
OR03400*	101	105.1	101.9	106	101.27	2.62
OR03425*	108	112.1	108.9	113	107.62	2.62
OR03450*	114	118.1	114.9	119	113.97	2.62
OR03475*	121	125.1	120.9	125	120.32	2.62
OR03500*	127	131.1	127.9	132	126.67	2.62
OR03525*	133	137.1	133.9	138	133.02	2.62
OR03550*	140	144.1	139.9	144	139.37	2.62
OR03575*	146	150.1	146.9	151	145.72	2.62
OR03600*	152	156.1	152.9	157	152.07	2.62
OR03625*	159	163.1	159.9	164	158.42	2.62
OR03650*	165	169.1	165.9	170	164.77	2.62
OR03675*	171	175.1	171.9	176	171.12	2.62
OR03700*	178	182.1	178.9	183	177.47	2.62
OR03725*	184	188.1	184.9	189	183.82	2.62
OR03750*	190	194.1	190.9	195	190.17	2.62
OR03775*	197	201.1	197.9	202	196.52	2.62
OR03800*	203	207.1	203.9	208	202.87	2.62
OR03825*	209	213.1	209.9	214	209.22	2.62
OR03850*	216	220.1	216.9	221	215.57	2.62
OR03875*	222	226.1	222.9	227	221.92	2.62
OR03900*	228	232.1	229.9	234	228.27	2.62
OR03925*	235	239.1	234.9	239	234.62	2.62
OR04028*	8	13.8	8.2	14	7.51	3.53
OR04036*	9	14.8	10.2	16	9.12	3.53
OR04050*	12	17.8	13.2	19	12.29	3.53
OR04055*	14	19.8	15.2	21	13.87	3.53
OR04061*	15	20.8	17.2	23	15.47	3.53
OR04067*	17	22.8	18.2	24	17.04	3.53
OR04075*	19	24.8	20.2	26	18.64	3.53
OR04081*	20	25.8	22.2	28	20.22	3.53
OR04087	22	27.8	23.2	29	21.82	3.53
OR04093	23	28.8	24.2	30	23.40	3.53
OR04100	25	30.8	26.2	32	24.99	3.53
OR00134	26	31.8	27.2	33	25.80	3.53
OR04106	27	32.8	28.2	34	26.58	3.53
OR04112	28	33.8	29.2	35	28.17	3.53
OR04118	30	35.8	31.2	37	29.75	3.53
OR04125	31	36.8	32.2	38	31.34	3.53
OR04131	33	38.8	34.2	40	32.93	3.53
OR04137	35	40.8	36.2	42	34.52	3.53
OR04143	36	41.8	37.2	43	36.10	3.53
OR04150	38	43.8	39.2	45	37.69	3.53
OR00144*	40	45.8	40.2	46	39.69	3.53
OR04162*	42	47.8	42.2	48	40.86	3.53
OR00146*	42	47.8	42.2	48	41.28	3.53
OR00147*	43	48.8	44.2	50	42.86	3.53
OR04175*	45	50.8	45.2	51	44.04	3.53
OR00149*	45	50.8	45.2	51	44.45	3.53
OR00150*	46	51.8	47.2	53	46.04	3.53
OR04187*	48	53.8	48.2	54	47.22	3.53
OR00152*	48	53.8	48.2	54	47.63	3.53
OR00153*	49	54.8	50.2	56	49.21	3.53
OR04200*	51	56.8	52.2	58	50.39	3.53
OR00155*	51	56.8	52.2	58	50.80	3.53
OR00156*	52	57.8	54.2	60	52.39	3.53
OR04212*	54	59.8	55.2	61	53.57	3.53
OR00158*	54	59.8	55.2	61	53.98	3.53
OR00159*	56	61.8	56.2	62	55.56	3.53
OR04225*	58	63.8	58.2	64	56.74	3.53
OR00161*	58	63.8	58.2	64	57.15	3.53
OR00162*	59	65.8	59.2	65	58.74	3.53
OR04237*	60	65.8	61.2	67	59.92	3.53

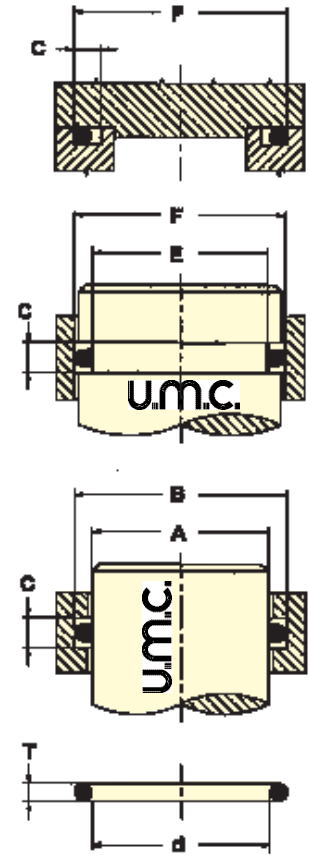

*OR da usare solo per tenute statiche

ANELLI DI TENU-

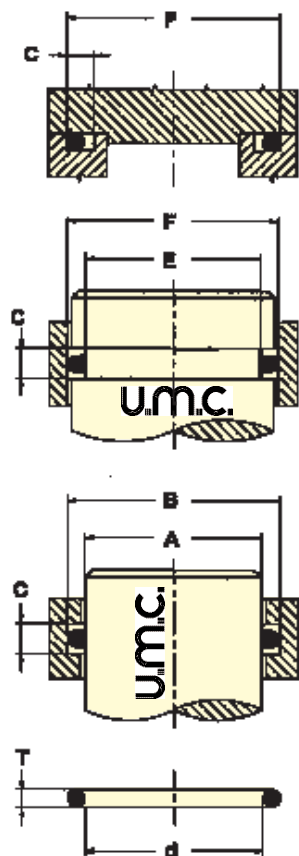

Corda	T (mm)	1,78	2,62	3,53	5,34	7,0
Gola	C (mm)	2,5	3,5	4,5	7	9,5


codice	A	B	E	F	d	T
OR00164*	61	66.8	61.2	67	60.33	3.53
OR00165*	62	67.8	63.2	69	61.91	3.53
OR04250*	64	69.8	64.2	70	63.09	3.53
OR00167*	64	69.8	64.2	70	63.50	3.53
OR00168*	65	70.8	66.2	72	65.09	3.53
OR04262*	67	72.8	67.2	73	66.27	3.53
OR00170*	67	72.8	67.2	73	66.68	3.53
OR00171*	68	73.8	69.2	75	68.26	3.53
OR04275*	70	75.8	71.2	77	69.44	3.53
OR00173*	70	75.8	72.2	77	69.85	3.53
OR00174*	72	77.8	72.2	78	71.44	3.53
OR04287*	73	78.8	74.2	80	72.62	3.53
OR00176*	74	79.8	74.2	80	73.03	3.53
OR00177*	75	80.8	75.2	81	74.61	3.53
OR04300*	76	81.8	77.2	83	75.80	3.53
OR04312*	79	84.8	80.2	86	78.97	3.53
OR04325*	82	87.8	83.2	89	82.14	3.53
OR04337*	85	90.8	86.2	92	85.32	3.53
OR04350*	89	94.8	89.2	95	88.50	3.53
OR04362*	92	97.8	93.2	99	91.67	3.53
OR04375*	95	100.8	96.2	102	94.84	3.53
OR04387*	98	103.8	99.2	105	98.02	3.53
OR04400*	101	106.8	102.2	108	101.2	3.53
OR04412*	105	110.8	105.2	111	104.4	3.53
OR04425*	108	113.8	108.2	114	107.5	3.53
OR04437*	111	116.8	112.2	118	110.7	3.53
OR04450*	114	119.8	115.2	121	113.9	3.53
OR04462*	117	122.8	118.2	124	117.1	3.53
OR04475*	120	125.8	121.2	127	120.2	3.53
OR04487*	123	128.8	124.2	130	123.4	3.53
OR04500*	127	132.8	127.2	133	126.6	3.53
OR04512*	130	135.8	130.2	136	129.8	3.53
OR04525*	133	138.8	134.2	140	132.9	3.53
OR04537*	136	141.8	137.2	143	136.1	3.53
OR04550*	140	145.8	140.2	146	139.3	3.53
OR04562*	143	148.8	143.2	149	142.5	3.53
OR04575*	146	151.8	146.2	152	145.6	3.53
OR04587*	149	154.8	149.2	155	148.8	3.53
OR04600*	152	157.8	153.2	159	152.0	3.53
OR04625*	159	164.8	159.2	165	158.3	3.53
OR04650*	165	170.8	166.2	172	164.7	3.53
OR04675*	172	177.8	172.2	178	171.0	3.53
OR04700*	178	183.8	178.2	184	177.4	3.53
OR04725*	184	189.8	184.2	190	183.7	3.53
OR04750*	190	195.8	191.2	197	190.1	3.53
OR04775*	197	202.8	197.2	203	196.4	3.53
OR04800*	203	208.8	204.2	210	202.8	3.53
OR04825*	210	215.8	210.2	216	209.1	3.53
OR04850*	216	221.8	216.2	222	215.5	3.53
OR04875*	222	227.8	222.2	228	221.8	3.53
OR04900*	229	234.8	229.2	235	228.2	3.53
OR04925*	235	240.8	235.2	241	234.5	3.53
OR04950*	241	246.8	242.2	248	240.9	3.53
OR04975*	248	253.8	248.2	254	247.2	3.53
OR41000*	254	259.8	254.2	260	253.6	3.53
OR41050*	266	271.8	267.2	273	266.27	3.53
OR41100*	279	284.8	280.2	286	278.99	3.53
OR41150*	292	297.8	293.2	299	291.69	3.53
OR41200*	304	309.8	305.2	311	304.39	3.53
OR41300*	330	335.8	331.2	337	329.79	3.53
OR41400*	355	360.8	356.2	362	355.19	3.53
OR41500*	381	386.8	382.2	388	380.59	3.53
OR41600*	405	410.8	406.2	412	405.26	3.53
OR41700*	431	436.8	432.2	438	430.66	3.53
OR41800*	456	461.8	457.2	463	456.06	3.53
OR06150*	38	47.0	39	48	37.47	5.34
OR06162*	41	50.0	43	52	40.65	5.34
OR06175*	44	53.0	46	55	43.82	5.34
OR06187*	47	56.0	49	58	47.00	5.34
OR06200*	50	59.0	52	61	50.16	5.34
OR06212*	53	62.0	55	64	53.34	5.34
OR06225*	57	66.0	59	68	56.52	5.34
OR06237	60	69.0	61	70	59.69	5.34
OR06250	63	72.0	64	73	32.87	5.34
OR06262	66	75.0	68	77	66.04	5.34
OR06275	69	78.0	71	80	69.22	5.34
OR06287	73	82.0	74	83	72.39	5.34
OR00178	75	84.0	76	85	74.63	5.34
OR06300	76	85.0	77	86	75.57	5.34
OR06312	79	88.0	81	90	78.74	5.34
OR00181	80	89.0	81	90	79.77	5.34
OR06325	82	91.0	83	92	81.92	5.34
OR06337	85	94.0	86	95	85.09	5.34
OR06350	88	97.0	89	98	88.27	5.34
OR00185	90	99.0	91	100	89.69	5.34

*OR da usare solo per tenute statiche

Corda	T (mm)	1.78	2.62	3.53	5.34	7.0
Gola	C (mm)	2.5	3.5	4.5	7	9.5


ANELLI DI TENU- TA O R

codice	A	B	E	F	d	T
OR06362	92	101.0	93	102	91.44	5.34
OR06375	95	104.0	96	105	94.62	5.34
OR06387	98	107.0	99	108	97.79	5.34
OR00189	100	109.0	101	110	100.0	5.34
OR06400	101	110.0	102	111	101.0	5.34
OR06412	104	113.0	106	115	104.1	5.34
OR06425	107	116.0	109	118	107.2	5.34
OR00193	110	119.0	111	120	109.5	5.34
OR06437	111	120.0	112	121	110.5	5.34
OR06450	114	123.0	116	125	113.7	5.34
OR00199*	118	127.0	119	128	117.5	5.34
OR00201*	121	130.0	123	132	120.7	5.34
OR00203*	124	133.0	126	135	123.8	5.34
OR00206*	127	136.0	128	137	127.0	5.34
OR00208*	130	139.0	131	140	130.2	5.34
OR00210*	134	143.0	136	145	133.4	5.34
OR00213*	137	146.0	138	147	136.5	5.34
OR00215*	140	149.0	141	150	139.7	5.34
OR00217*	143	152.0	144	153	142.9	5.34
OR00219*	146	155.0	147	156	146.1	5.34
OR00221*	150	159	151	160	149.2	5.34
OR06600*	152	161	153	162	151.77	5.34
OR06625*	158	167	160	169	158.11	5.34
OR06645*	165	174	166	175	164.46	5.34
OR06670*	171	180	172	181	170.82	5.34
OR06700*	177	186	179	188	177.16	5.34
OR06720*	184	193	185	194	183.51	5.34
OR06745*	190	199	191	200	189.86	5.34
OR06775*	196	205	198	207	196.21	5.34
OR06795*	202	211	204	213	202.56	5.34
OR06820*	209	218	211	220	208.91	5.34
OR06850*	215	224	217	226	215.26	5.34
OR06870*	222	231	223	232	221.61	5.34
OR06895*	228	237	230	239	227.96	5.34
OR06920*	234	243	236	245	234.31	5.34
OR06945*	241	250	242	251	240.66	5.34
OR06975*	247	256	249	258	247.01	5.34
OR06995*	253	262	255	264	253.36	5.34
OR61050*	266	275	268	277	266.06	5.34
OR61100*	279	288	280	289	278.76	5.34
OR61150*	291	300	293	302	291.46	5.34
OR61200*	304	315	306	315	304.16	5.34
OR61300*	328	337	329	338	327.56	5.34
OR61400*	355	364	357	366	354.96	5.34
OR61500*	380	389	382	391	380.36	5.34
OR61600*	405	414	407	416	405.26	5.34
OR91700*	431	440	432	441	430.66	5.34
OR61800*	456	465	458	467	456.06	5.34
OR61900*	481	490	483	492	481.41	5.34
OR92000*	507	516	508	517	506.81	5.34
OR62100*	532	541	534	543	532.20	5.34
OR08450	114	126	115	127	113.7	7.0
OR00197	115	127	116	128	114.7	7.0
OR08462	117	129	118	130	116.8	7.0
OR08475	120	132	123	135	120.0	7.0
OR08487	123	135	125	137	123.2	7.0
OR00204	125	137	126	138	124.6	7.0
OR08500	126	138	128	140	126.4	7.0
OR08512	130	142	131	143	129.5	7.0
OR08525	133	145	134	146	132.7	7.0
OR00211	135	147	136	148	134.5	7.0
OR08537	136	148	138	150	135.9	7.0
OR08550	139	151	141	153	139.1	7.0
OR08562	142	154	144	156	142.2	7.0
OR08575	145	157	148	160	145.4	7.0
OR08587	149	161	150	162	148.6	7.0
OR08600	152	164	153	165	151.8	7.0
OR00223	156	168	158	170	155.6	7.0
OR08625	158	170	160	172	158.1	7.0
OR00225	160	172	161	173	159.5	7.0
OR00226	162	174	163	175	161.9	7.0
OR08650	165	177	166	178	164.5	7.0
OR00228	167	179	168	180	166.7	7.0
OR00229	168	180	170	182	168.3	7.0
OR08675	170	182	172	184	170.8	7.0
OR00231	175	187	176	188	174.6	7.0
OR08700	178	190	179	191	177.2	7.0
OR00233	180	192	183	195	181.0	7.0
OR08725	184	196	185	197	183.5	7.0
OR00235	188	200	188	200	187.3	7.0
OR08750	190	202	191	203	189.9	7.0
OR00237	194	206	195	207	193.7	7.0
OR08775	196	208	198	210	196.2	7.0
OR00239	200	212	202	214	200.0	7.0
OR08800	203	215	204	216	202.6	7.0

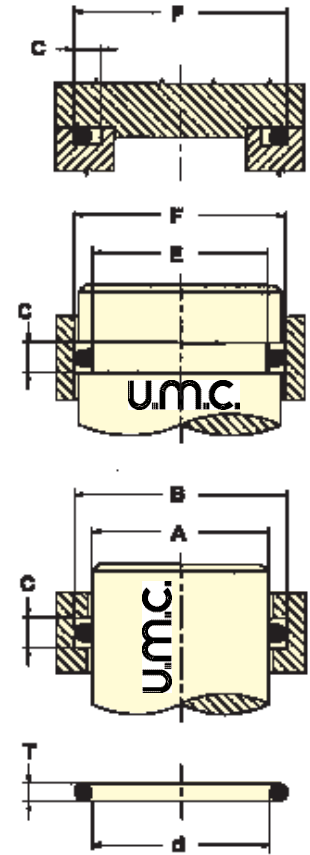

*OR da usare solo per tenute statiche

ANELLI DI TENU- TA O R

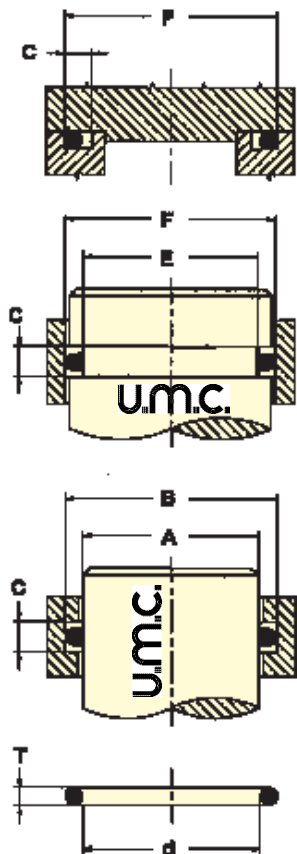

Corda	T (mm)	1.78	2.62	3.53	5.34	7.0
Gola	C (mm)	2.5	3.5	4.5	7	9.5

codice	A	B	E	F	d	T
OR08825	210	222	210	222	208.9	7.0
OR08850	215	227	218	230	215.3	7.0
OR08875	222	234	223	235	221.6	7.0
OR08900	230	242	230	242	227.9	7.0
OR08925	235	247	238	250	234.3	7.0
OR08950	240	252	243	255	240.7	7.0
OR08975	248	260	248	260	247.0	7.0
OR81000	255	267	258	270	253.3	7.0
OR81025	260	272	263	275	259.7	7.0
OR81050	265	277	268	280	266.1	7.0
OR81075	273	285	274	286	272.4	7.0
OR81100	280	292	283	295	278.7	7.0
OR81125	285	297	288	300	285.2	7.0
OR81150	292	304	293	305	291.5	7.0
OR81175	300	312	303	315	297.8	7.0
OR81200	305	317	308	320	304.1	7.0
OR81250	318	330	318	330	316.9	7.0
OR81300	330	342	333	345	329.5	7.0
OR81350	342	354	343	355	342.3	7.0
OR81400	355	367	358	370	354.9	7.0
OR81450	370	382	368	380	367.7	7.0
OR81500	380	392	383	395	380.3	7.0
OR81550	393	405	398	410	393.1	7.0
OR81600*	405	417	408	420	405.3	7.0
OR81650*	420	432	423	435	418.0	7.0
OR81700*	430	442	433	445	430.7	7.0
OR81750*	445	457	448	460	443.4	7.0
OR81800*	460	472	463	475	456.1	7.0
OR81850*	470	482	473	485	468.8	7.0
OR81900*	485	497	488	500	481.5	7.0
OR81950*	495	507	498	510	494.2	7.0
OR82000*	510	522	513	525	506.9	7.0
OR82100*	535	547	538	550	532.3	7.0
OR82200*	560	572	563	575	557.7	7.0
OR82300*	585	597	588	600	582.7	7.0
OR82400*	610	622	613	625	608.1	7.0
OR82500*	635	647	638	650	633.5	7.0
OR82600*	660	672	663	675	658.9	7.0

*OR da usare solo per tenute statiche